


Roof Outlets

Accessories


Easy Trim Extension Rings

The **CaroFlow** "Easitrim" Extension Rings have been designed for use where a single level drainage "upside-down" warm roof system is specified. It will raise the grating by up to 110mm to allow for the height required from waterproof membrane to finished roof surface. Due to their unique designs, the EASITRIM will not only allow for drainage from any level, but if necessary, can be reduced in height by trimming with a hacksaw on site or prior to delivery.


Each EASITRIM Extension Ring is supplied complete with extra long threaded stainless steel fixing studs.

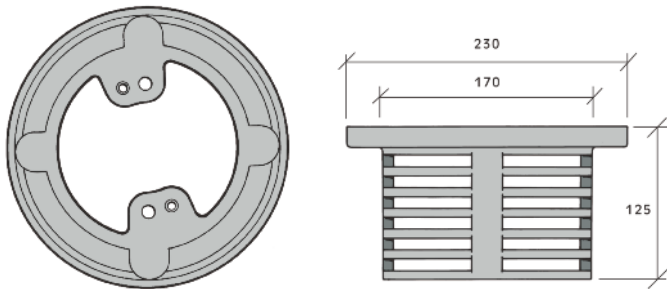


Extension Ring Code 50/75ER
(To suit all 50mm and 75mm Circular Outlets)

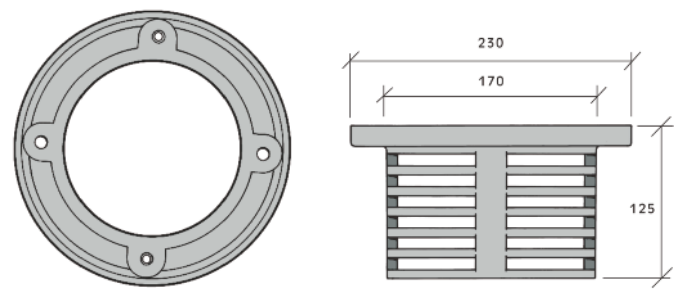

Extension Ring Code 100/150ER
(To suit all 100mm and 150mm Circular Outlets)

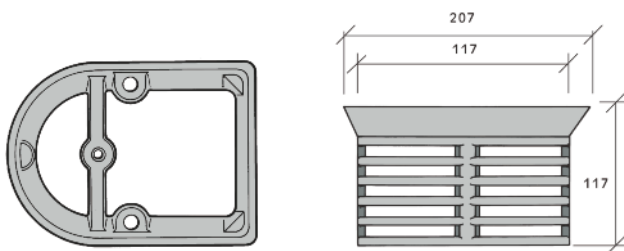


Balcony Outlet Extension Ring Code B0/ER
(To suit all Balcony Outlets)

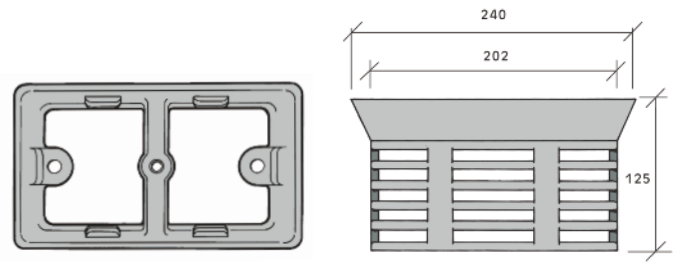

Gulley Outlet Extension Ring Code G0/ER

Threaded Adaptors

CaroFlow threaded adaptors are manufactured in ABS Plastic and are male taper threaded at one end to BS21 for connection into any **CaroFlow** threaded connection outlet. The other end is then turned and chamfered to BSEN 1566:2004 spigot dimensions to suit nominal bores of 50mm, 75mm, 100mm and 150mm. They are recommended for use where extra length is required, i.e. when the joint between outlet and pipework is likely to be cast within the concrete slab, or where a Two Way outlet is to be connected directly to "O" Ring socketed PVC pipework. The standard length of a **CaroFlow** adaptor is 300mm, but longer lengths can be produced to order.

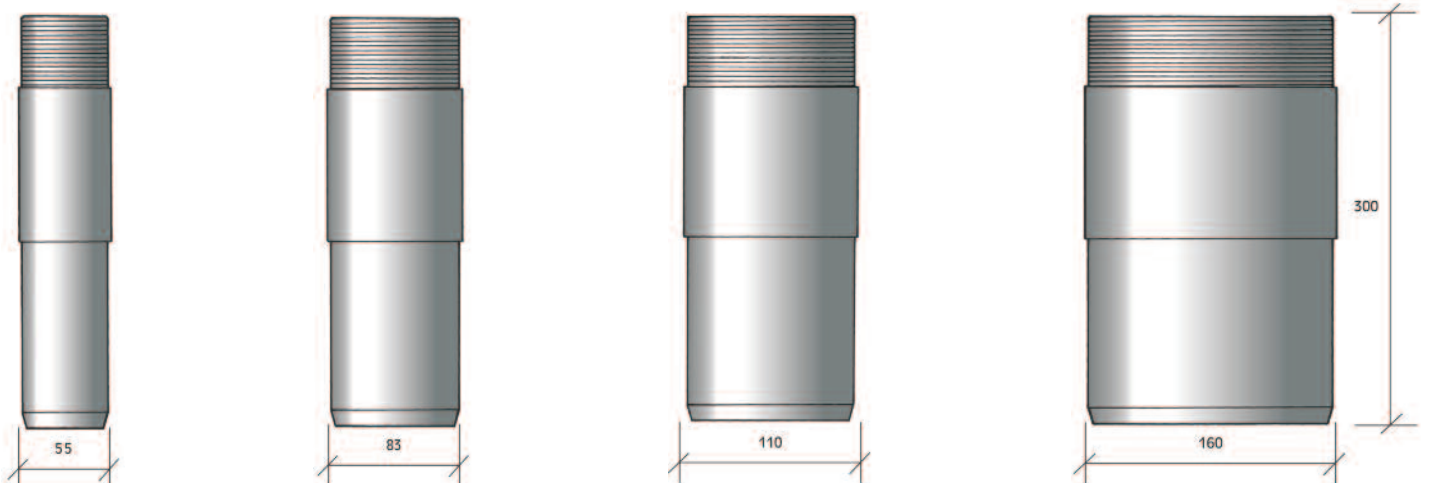

Code 50/ADP

Code 75/ADP

Code 100/ADP

Code 150/ADP

All drawings above are not to scale