

## Roof Outlets

### Balcony Outlets




**Caroflow** Balcony Spigot roof outlets are designed to allow the unit to be installed against a wall/upstand and the grating, which can be cut on site or prior to delivery, will allow various sizes of pipework to drain into the outlet from upper levels to give a continuous drainage line from top to bottom storey. Available in either LM6 Aluminium Silicon casting alloy to BS EN 1706:2010 for most roof finishes or in leaded gunmetal to BS EN 1982:2008 for use with lead or copper-clad roofs or for connection to copper pipework.

**Performance and Connections** see page 19.

Suitable for connection to:


- PVC (50/BO will not connect directly – use heat shrink adaptor or flexible coupling)
- Aluminium
- Cast Iron
- Copper (Gunmetal only)

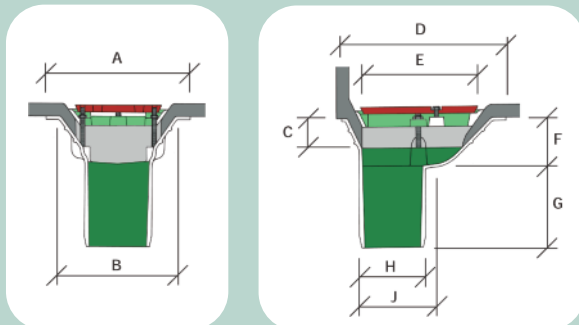


Order Code	50/BO	75/BO	100/BO
Pipe size (nom)	50	75	100
A	230	230	230
B	190	190	190
C	50	50	50
D	265	265	265
E	206	206	206
F	85	85	85
G	130	130	130
H	60	83	110
J	142	142	142

#### Example specification


100mm nominal bore CAROFLOW Balcony Spigot aluminium (or leaded gunmetal) rainwater outlet with a flat grating Code 100/BO (100/BO/100H to indicate that the grating must be cut to receive 100mm pipe) as manufactured by Caroflow Limited Tel: 01763 244446.

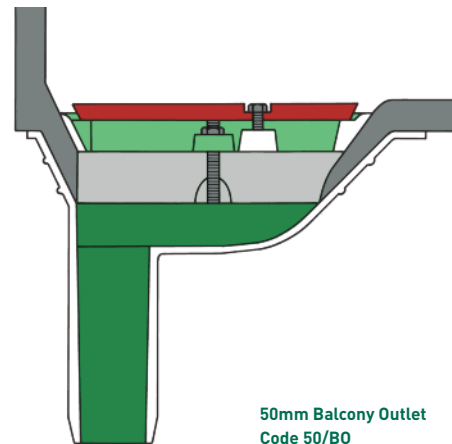


50mm Balcony Outlet  
Code 50/BO

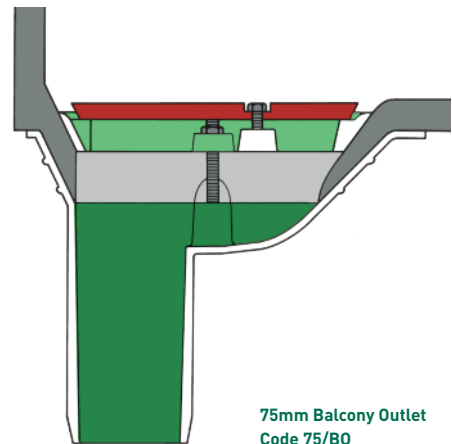

75mm Balcony Outlet  
Code 75/BO

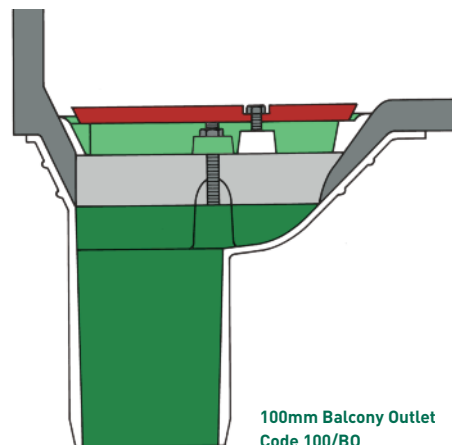

100mm Balcony Outlet  
Code 100/BO

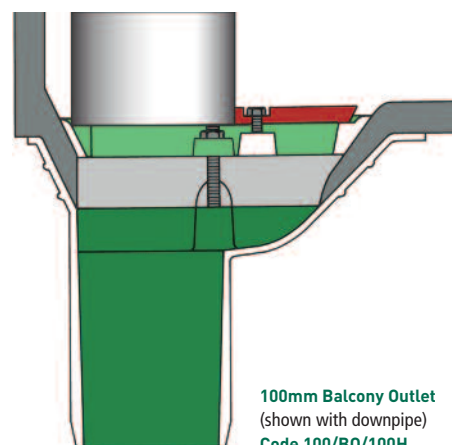

100mm Balcony Outlet  
(shown with downpipe)  
Code 100/BO/100H

All drawings above are shown 1:5 scale